

Dadi di trascinamento• DIN 2079
EH 23100.


Descrizione prodotto




Materiale

- Acciaio legato, cementato e temperato, brunito, rettificato

Disegno

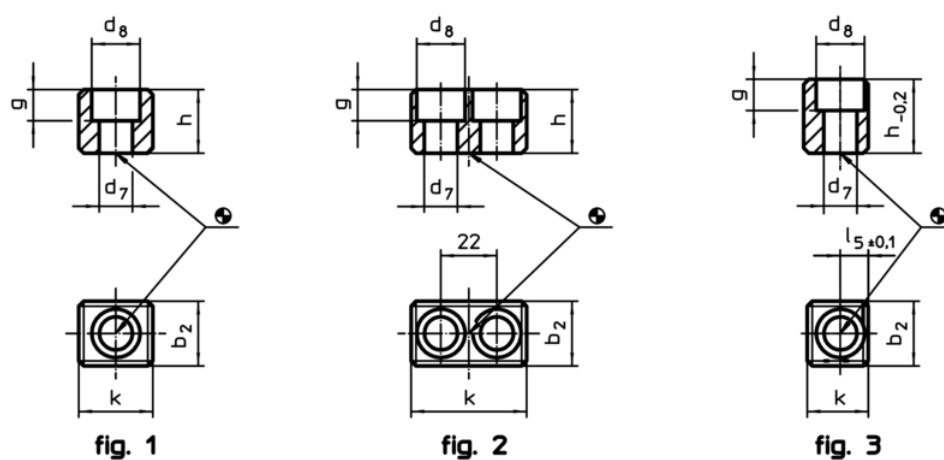

Caratteristiche

Per mandrini grand.	Dimensioni							Per viti ISO 4762		Cod.
	k	b ₂ h5	d ₇	d ₈	g	h	l ₅ ±0,1			
	[mm]									
Per mandrini da gr. 30 a gr. 60, forma A – Fig. 1										
30	16,5	15,9	6,4	10,4	6,2	16,0	–	M 6 x 16	25	23100.0030
40	19,5	15,9	6,4	10,4	6,2	16,0	–	M 6 x 16	31	23100.0040
45	19,5	19,0	8,4	13,5	8,3	19,0	–	M 8 x 20	38	23100.0045
50 – 55	26,5	25,4	13,0	19,0	12,3	25,0	–	M12 x 25	85	23100.0050
60	45,5	25,4	13,0	19,0	12,3	25,0	–	M12 x 25	179	23100.0060
Per mandrini gr. 60, forma B – Fig. 2										
60	45,5	25,4	13,0	19,0	12,3	25,0	–	M12 x 25	140	23100.0160
Per mandrini da gr. 30 a gr. 50, forma C – Fig. 3										
30	13,5	15,9	6,4	10,4	6,2	24,5	5,5	M 6 x 25	30	23100.0230
40	16,5	15,9	6,4	10,4	6,2	24,5	7,0	M 6 x 25	39	23100.0240
45	17,5	19,0	8,4	13,5	10,0	26,0	7,5	M 8 x 25	47	23100.0245
50	24,0	25,4	13,0	19,0	12,3	29,0	11,0	M12 x 30	89	23100.0250

Esempio di applicazione

